



Model 942-MW

Emergency Pressure Relief Vent

BSBflamearrester.ie | BSBsystems.com
 Visit our website for the most complete, up-to-date information

Drawing on extensive experience in the pressure relief field, the BS&B FlameSaf® Emergency Relief Vent offers a dependable, internationally certified and precisely engineered design to prevent excessive pressure build-up and rupture of valuable tankage during abnormal operation or as a result of exposure to fire. Designed for the highest standards of precision and safety, these vents use fluoropolymer or elastomer diaphragms to provide tight seals between pallet and seat, which coupled with the 10% overpressure feature result in reliable and accurate response to even minimal changes in pressure. Users benefit from optimized operating conditions close to MAWP (Maximum Allowable Working Pressure) while ensuring operation that safeguard both personnel and environment.

Features

- Complies with API 2000 / EN ISO 28300
- Certified to ATEX – Directive 2014/34/EU
- Achieves full open (relieving pressure) at just 10% overpressure
- Flexible seal material choices including FEP, FPM, NBR and others on request.
- Leakage rates much tighter than API 2000/EN ISO 28300 requirements

Protection

Group II EPL Ga/Gb device suitable for use with gas/air and vapour air mixtures of inflammable liquids of explosion group IIA/IIB.

Flange Connection Type

EN 1092- PN10
 ANSI Class 150 B16.5
 ISO 7005 PN10

Other types available upon request.




Model 942-MW
 Emergency Pressure
 Relief Vent




Materials of Construction				
	Carbon Steel Version		Stainless Steel Version	
	Carbon Steel	Stainless Steel	Carbon Steel	Stainless Steel
Disk		✓		✓
Wet parts (Disk and Seat Pipe)		✓		✓
Flange	✓			✓
Arm	✓			✓
Weights	✓			✓

EC Type Examination	
Designation	942-MW 200 to 900
Protective System	Emergency Pressure Relief Vent
ATEX Certificate Number	IBExU20ATEX1057 X
Compliance with	ATEX Directive 2014/34/EU EN ISO 80079-36 EN ISO 80079-37 EN ISO 28300 API Standard 2000

Tank Pressure/Volume Flow Chart

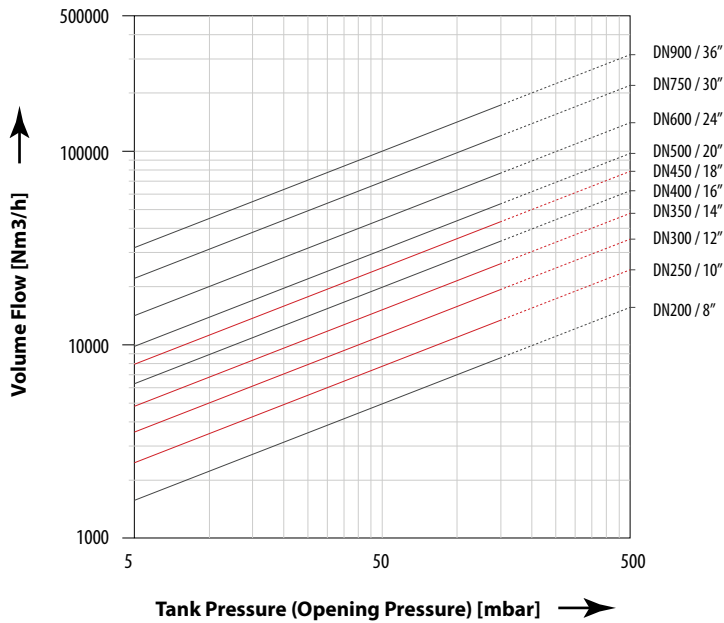

Dimensions

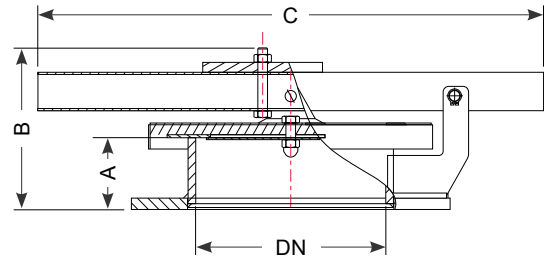

DN	Dimensions (mm)		
	A	B	C*
DN200 / 8"	75	168	540
DN250 / 10"	110	216	650
DN300 / 12"	110	216	670
DN350 / 14"	113	219	715
DN400 / 16"	118	229	715
DN450 / 18"	118	229	765
DN500 / 20"	143	254	885
DN600 / 24"	143	262	960
DN750 / 30"	178	292	1150
DN900 / 36"	178	297	1350

*Dependent on set pressure

Temperatures	
Atm. Temperature	- 20 °C to + 60 °C
Operating Temperature*	- 20 °C to +160 °C
*Maximal 80% of ignition temperature stored medium	

Please contact us for applications outside of the above ranges.

Vent Settings	
Set Pressure	+2.5 mbar to +150 mbar

Chennai, India

T: +91 44 2450 4200
F: +91 44 2450 1056
E: sales@bsbsystems.com

Limerick, Ireland

T: +353 61 517000
F: +353 61 309689
E: info@bsbflamearrestor.ie

Moscow, Russia

T: +7 495 747 5916
F: +7 499 133 4394
E: sales@bsbsystems.ru

Tulsa, OK USA

T: +1 918 622 5950
F: +1 918 665 3904
E: sales@bsbsystems.com

Edmonton, AB Canada

T: +1 780 955 2888
F: +1 780 955 3975
E: contacts@bsbprocess.com

Manchester, UK

T: +44 0 161 955 4202
F: +44 0 161 870 1086
E: sales@bsb-systems.co.uk

Sao Paulo, Brasil

T: +55 11 2084 4800
F: +55 11 2021 3801
E: sales@bsbbrasil.com

United Arab Emirates

T: +971 2406 9603
F: +971 2406 9810
E: sales@bsbsystems.ae

Düsseldorf, Germany

T: +49 211 930550
E: info@bormann-neupertbsb.de

Minneapolis, MN USA

T: +1 952 941 0146
F: +1 952 941 0646
E: sales@bsbipd.com

Shanghai, China

T: +86 21 6391 2299
F: +86 21 6391 2117
E: sales@bsbsystems.com

Yokohama, Japan

T: +81 45 450 1271
F: +81 45 451 3061
E: information@bsb-systems.co.jp

Houston, TX USA

T: +1 713 682 4515
F: +1 713 682 5992
E: sales@bsbsystems.com

Monterrey, Mexico

T: +011 52 81 1958 0560
F: +011 52 81 1958 0560 138
E: sales@bsbsystems.com

Singapore

T: +65 6513 9780
F: +65 6484 3711
E: sales@bsb.com.sg

Products, specifications and all data in this literature are subject to change without notice. Questions regarding product selection and specifications for specific applications should be directed to BS&B. All sales are subject to the BS&B companies' standard terms and conditions of sale. Nothing herein should be construed as a warranty of merchantability or fitness for a particular purpose.

